

# **FCC Test Report**

Report No.: AGC02550250302FE02

FCC ID XBPUV-K1

**APPLICATION PURPOSE**: Original Equipment

**PRODUCT DESIGNATION**: Two Way Radio

**BRAND NAME** : QUANSHENG

UV-K1, UV-K1s, UV-K1(2), UV-K1(5), UV-K1(6), UV-K1(8),

**MODEL NAME** : UV-K1(9), UV-K1(11), UV-K1(22), UV-K1(55), UV-K1(66),

UV-K1(88), UV-K1(99)

**APPLICANT**: QUANSHENG ELECTRONICS CO., LTD.

**DATE OF ISSUE** : May 13, 2025

**STANDARD(S)** : FCC Part 15 Subpart B

**REPORT VERSION**: V1.0


Attestation of Global Compliance (Shenzhen) Co., Ltd



Page 2 of 29

# **Report Revise Record**

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 13, 2025	Valid	Initial Release





# **Table of Contents**

1. General Information	4
2. Product Information	5
2.1 Product Technical Description	5
2.2 Auxiliary Surrounding Description	5
2.2 Test Methodology	6
2.3 Definition of Device Classification	6
2.3 Description of Test Modes	6
3. Test Environment	7
3.1 Address of The Test Laboratory	7
3.2 Test Facility	7
3.3 Environmental Conditions	8
3.4 Measurement Uncertainty	8
3.5 List of Equipment Used	
4. Summary of Test Results	10
5. Radiated Emission Measurements	11
5.1 Provisions Applicable	11
5.2 Measurement Setup	11
5.3 Measurement Procedure	12
5.4 Measurement Resul	13
6. Conducted Emission Measurements	21
6.1 Provisions Applicable	21
6.2 Measurement Setup	21
6.3 Measurement Procedure	22
6.4 Measurement Result	23
Appendix I: Photographs of Test Setup	27
Annendix II: Photographs of Test FLIT	28



Page 4 of 29

# 1. General Information

Applicant	QUANSHENG ELECTRONICS CO., LTD.
Address	No 82, Qiuzhong Industry Area Xiamei Town, Nanan City Fujian Province China
Manufacturer	QUANSHENG ELECTRONICS CO., LTD.
Address	No 82, Qiuzhong Industry Area Xiamei Town, Nanan City Fujian Province China
Factory	QUANSHENG ELECTRONICS CO., LTD.
Address	No 82, Qiuzhong Industry Area Xiamei Town, Nanan City Fujian Province China
Product Designation	Two Way Radio
Brand Name	QUANSHENG
Test Model	UV-K1
Series Model(s)	UV-K1s, UV-K1(2), UV-K1(5), UV-K1(6), UV-K1(8), UV-K1(9), UV-K1(11), UV-K1(22), UV-K1(55), UV-K1(66), UV-K1(88), UV-K1(99)
Difference Description	Series models and main model product are only different appearance lines and model names are different.
Date of receipt of test item	Mar. 14, 2025
Date of Test	Apr. 07, 2025~Apr. 19, 2025
Deviation from Standard	No any deviation from the test method
Condition of Test Sample	Normal
Test Result	Pass
Test Report Form No	AGCTR-ER-FCC-SDOC V1.0

Note: The test results of this report relate only to the tested sample identified in this report.

Prepared By	Jouk Gai	
	Jack Gui (Project Engineer)	May 13, 2025
Reviewed By	Bibo zhang	
	Bibo Zhang (Reviewer)	May 13, 2025
Approved By	Angole li	
	Angela Li (Authorized Officer)	May 13, 2025



Page 5 of 29

### 2. Product Information

# 2.1 Product Technical Description

Housing Type	Plastic and metal
Highest Operating Frequency	☐Greater than 108MHz ⊠Less than 108MHz
Equipment Type	Table-Top
Receiving Frequency	88.1-108MHz
Hardware Version	K1-V1.0
Software Version	V6.00.06
Power Supply	DC 12V from Adapter and DC 7.4V, 1400mAh by Battery or DC 12V from Adapter and DC 7.4V, 2500mAh by Battery

# I/O Port Information (⊠Applicable ☐Not Applicable)

I/O Port of EUT				
I/O Port Type	Q'TY	Cable	Tested with	
Antenna Port	1	0	1	
Type-C Port	1	0	1	
Earphone Port	1	0	1	

# 2.2 Auxiliary Surrounding Description

The Following Peripheral Devices and Interface Cables Were Connected During the Measurement:

☐ Test Accessories Come From The Laboratory

No	. Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Adapter	XIAOMI	MDY-11-EF	Input(AC):100V-240V 50/60Hz, 0.7A Output: DC 12V 2.5A	2.2m,unshiel ded

# 

No.	Equipment	Manufacturer	Model No.	Specification Information	Cable
1	Battery1#	QUANSHENG ELECTRONICS CO., LTD.	BP9614SD	DC 7.4V 1400mAh	1
2	Battery2#	QUANSHENG ELECTRONICS CO., LTD.	BP6828SG	DC 7.4V 2500mAh	-
3	Charger	N/A	C-51	Input: DC 12V 1A Output: 8.4V 0.5A	



Page 6 of 29

# 2.2 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 15	Radio Frequency Devices
2	ANSI C63.4-2014	American National Standard for Methods of Measurement of Radio Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz

### 2.3 Definition of Device Classification

Unintentional radiator:

A device which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment.

Class B Digital Device:

A digital device which is marketed for use by the general public or in a residential environment.

### Note:

A manufacturer may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

### 2.3 Description of Test Modes

No.	Test Mode
1	FM Receiver at 65MHz-108MHz Mode



Page 7 of 29

# 3. Test Environment

# 3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

# 3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

# **CNAS-Lab Code: L5488**

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements) for the Competence of Testing and Calibration Laboratories.

# A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

# FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

# IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



Page 8 of 29

### 3.3 Environmental Conditions

	Normal Conditions
Temperature range (℃)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

# 3.4 Measurement Uncertainty

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 3.9 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$



Page 9 of 29

# 3.5 List of Equipment Used

•	Radiated Emission												
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2025-01-14	2026-01-13						
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23						
$\boxtimes$	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2024-05-28	2025-05-27						
$\boxtimes$	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10						
$\boxtimes$	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2025-03-29	2026-03-28						
$\boxtimes$	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2024-07-24	2026-07-23						

•	AC Power Line Conducted Emission												
Used	Equipment No.	nent No. Test Equipment Manufacturer			Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)						
$\boxtimes$	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2024-05-24	2025-05-23						
$\boxtimes$	AGC-ER-A007	6dB Fixed Attenuator	Mini circuits	BW-S6-2W263 A+	N/A	2025-01-30	2026-01-29						
$\boxtimes$	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2024-05-28	2025-05-27						

• Tes	Test Software												
Used	Equipment No.	Test Equipment	Manufacturer Model No.		Version Information								
$\boxtimes$	AGC-EM-S004	RE Test System	Tonscend	TS <sup>+</sup> Ver2.1(JS32-RE)	4.0.0.0								
	AGC-EM-S003	RE Test System	FARA	EZ-EMC	V.RA-03A								
$\boxtimes$	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71								



Page 10 of 29

# 4. Summary of Test Results

Item	FCC Rules	Description Of Test	Class/Severity	Result
1	Section 15.107	Radiated Emission	Class B	Pass
2	Section 15.109	Conducted Emission	Class B	Pass




### 5. Radiated Emission Measurements

# 5.1 Provisions Applicable


FCC CFR Title 47 Part 15 Subpart B Section 15.109:

Frequency Range	Class B Limit (dBuV/m @3m)	Class A Limit (dBuV/m @3m)	Value	
30MHz-88MHz	40.00	50.00	Quasi-peak	
88MHz-216MHz	43.50	53.50	Quasi-peak	
216MHz-960MHz	46.00	56.00	Quasi-peak	
960MHz-1GHz	54.00	64.00	Quasi-peak	
Above 1GHz	54.00	60.00	Average	
ADOVE IGHZ	74.00	80.00	Peak	

# 5.2 Measurement Setup

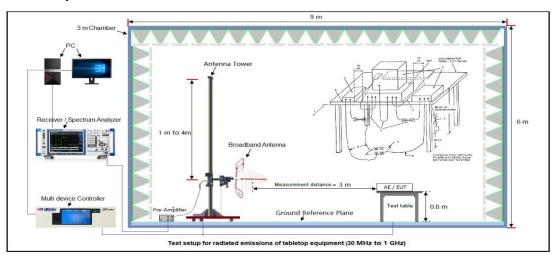

# Radiated Emission Measurements Test Setup for 30MHz to 1GHz

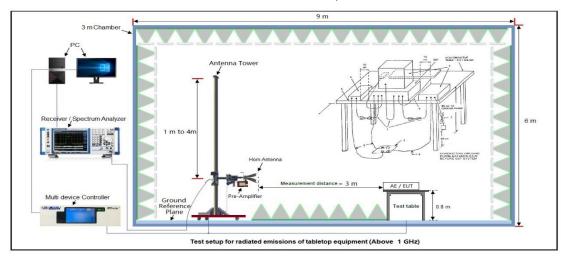

### Radiated Emission Measurements Test Setup for above 1GHz



Page 12 of 29

### **5.3 Measurement Procedure**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden turntable with a height of 0.8 meters is used which is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received power by AC 120V/60Hz.
- 5. The antenna was placed at 3 meter away from the EUT as stated in FCC Part 15. The antenna connected to the Analyzer via a cable and at times a pre-amplifier would be used.
- 6. The Analyzer / Receiver quickly scanned from 30MHz to 1000MHz. The EUT test program was started. Emissions were scanned and measured rotating the EUT to 360 degrees and positioning the antenna 1 to 4 meters above the ground plane, in both the vertical and the horizontal polarization, to maximize the emission reading level.
- 7. The test mode(s) were scanned during the test:
- 8. Recorded at least the six highest emissions. Emission frequency, amplitude, antenna position, polarization and turntable position were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit and Q.P./Peak reading is presented. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
- 9. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
- 10. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 11. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the guasi-peak method for below 1GHz.
- 12. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 13. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- 14. The test data of the worst case condition (mode 1) was reported on the following Data page.

### **EMI Test Receiver Setup:**


During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW Video B/W		IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above 1 GHz	1MHz	10 Hz	/	Ave.




Report No.: AGC02550250302FE02 Page 13 of 29

5.4 Measurement Resul

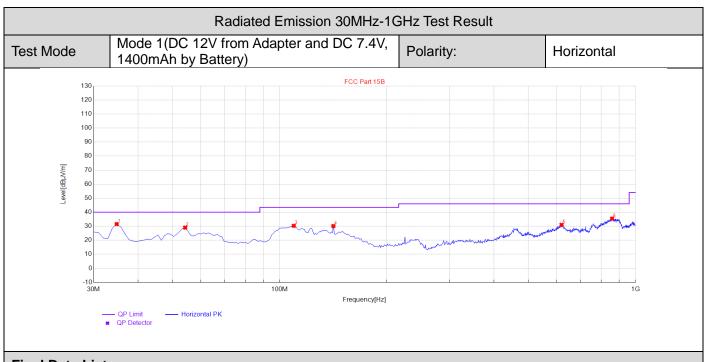


Final	Final Data List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity					
1	34.85	31.55	11.83	40.00	8.45	100	316	Horizontal					
2	54.25	29.01	16.35	40.00	10.99	100	200	Horizontal					
3	109.54	30.30	16.58	43.50	13.20	100	360	Horizontal					
4	141.55	30.14	16.13	43.50	13.36	100	171	Horizontal					
5	619.76	31.01	25.90	46.00	14.99	100	105	Horizontal					
6	859.35	35.44	29.99	46.00	10.56	100	254	Horizontal					


**RESULT: PASS** 






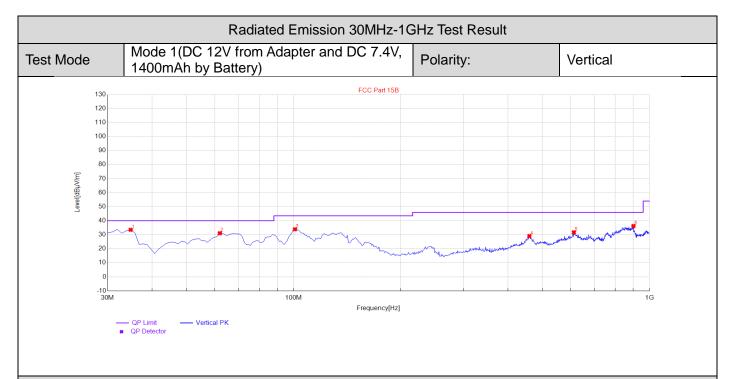


Final I	Final Data List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	34.85	33.53	11.83	40.00	6.47	100	0	Vertical				
2	62.01	31.07	17.23	40.00	8.93	100	56	Vertical				
3	100.81	33.86	17.04	43.50	9.64	100	214	Vertical				
4	459.71	29.07	24.69	46.00	16.93	100	159	Vertical				
5	612.97	31.75	25.14	46.00	14.25	100	201	Vertical				
6	901.06	36.19	29.99	46.00	9.81	100	184	Vertical				






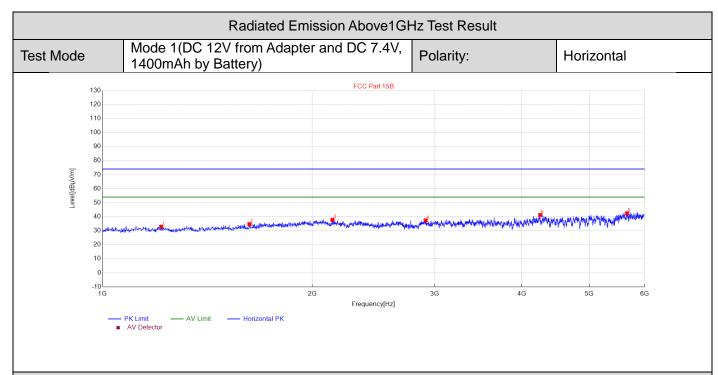


Final	Final Data List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity					
1	1214.042809	32.88	-17.99	74.00	41.12	100	190	Horizontal					
2	1625.125025	34.72	-16.51	74.00	39.28	100	130	Horizontal					
3	2138.227646	37.77	-13.07	74.00	36.23	100	10	Horizontal					
4	2910.382076	37.36	-12.02	74.00	36.64	100	210	Horizontal					
5	4250.65013	41.25	-8.92	74.00	32.75	100	20	Horizontal					
6	5662.932587	42.42	-6.40	74.00	31.58	100	320	Horizontal					






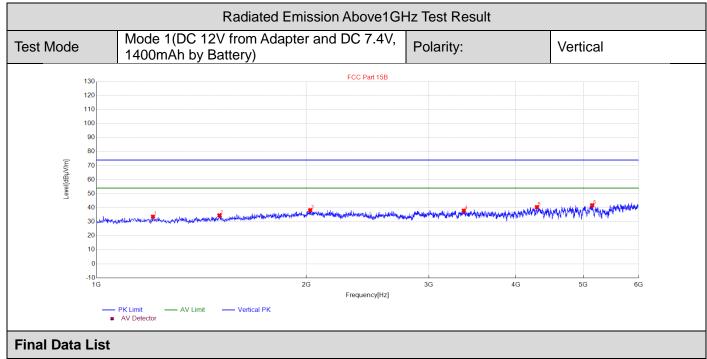

Final Data List												
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	1205.041008	33.60	-18.02	74.00	40.40	100	230	Vertical				
2	1501.10022	34.55	-17.53	74.00	39.45	100	210	Vertical				
3	2026.205241	38.23	-13.34	74.00	35.77	100	140	Vertical				
4	3367.473495	37.90	-10.99	74.00	36.10	100	40	Vertical				
5	4288.657732	40.42	-8.76	74.00	33.58	100	150	Vertical				
6	5147.829566	41.76	-7.51	74.00	32.24	100	90	Vertical				






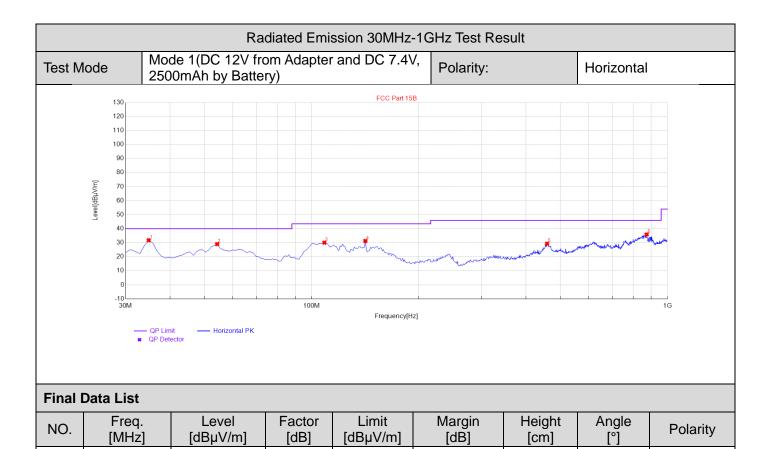


### 31.79 40.00 1 34.85 11.83 8.21 100 2 Horizontal 2 54.25 29.00 16.35 11.00 100 271 40.00 Horizontal 3 30.02 16.62 43.50 13.48 2 Horizontal 108.57 100 4 141.55 31.26 16.13 43.50 12.24 100 163 Horizontal 5 458.74 29.32 24.41 46.00 16.68 100 47 Horizontal 29.54 6 873.9 35.89 46.00 10.11 100 313 Horizontal


**RESULT: PASS** 






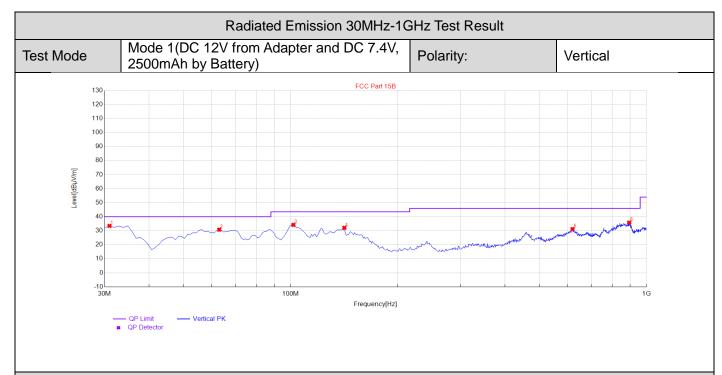


Final I	Final Data List											
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity				
1	30.97	33.46	13.01	40.00	6.54	100	156	Vertical				
2	62.98	30.76	16.92	40.00	9.24	100	122	Vertical				
3	101.78	34.20	16.98	43.50	9.30	100	81	Vertical				
4	141.55	32.10	16.13	43.50	11.40	100	77	Vertical				
5	619.76	31.18	25.90	46.00	14.82	100	31	Vertical				
6	894.27	35.79	30.03	46.00	10.21	100	127	Vertical				






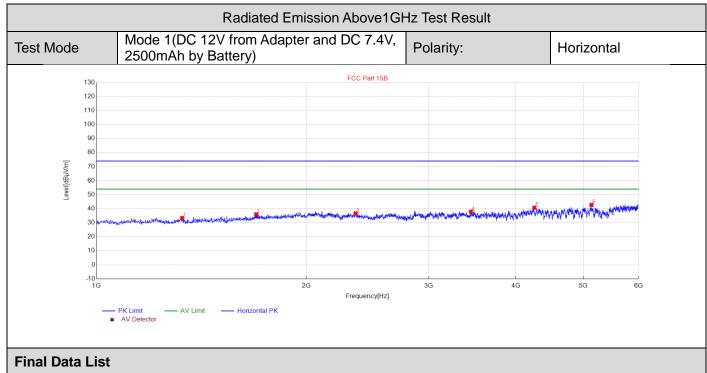

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	1327.065413	33.40	-17.82	74.00	40.60	100	60	Horizontal
2	1695.139028	35.99	-15.93	74.00	38.01	100	150	Horizontal
3	2355.271054	36.64	-12.55	74.00	37.36	100	150	Horizontal
4	3447.489498	37.94	-10.78	74.00	36.06	100	290	Horizontal
5	4251.65033	40.76	-8.92	74.00	33.24	100	40	Horizontal
6	5135.827165	42.73	-7.53	74.00	31.27	100	160	Horizontal





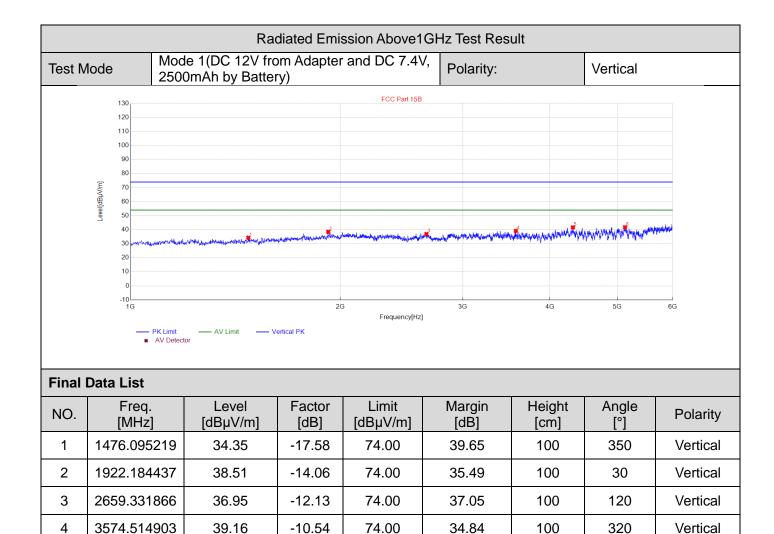

74.00

74.00

32.31

32.25

100

100

230

250

Vertical

Vertical

# **RESULT: PASS**

4316.663333

5127.825565

### Note:

5

6

1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin= Measurement-Limit.

-8.65

-7.54

2. The "Factor" value can be calculated automatically by software of measurement system.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

41.69

41.75



Page 21 of 29

# 6. Conducted Emission Measurements

# **6.1 Provisions Applicable**

FCC CFR Title 47 Part 15 Subpart B Section 15.107:


For Class B Limits:

Fraguenay	Maximum RF Line Voltage							
Frequency	Q.P. (dBμV)	Average (dBµV)						
150kHz~500kHz	66-56	56-46						
500kHz~5MHz	56	46						
5MHz~30MHz	60	50						

### For Class A Limits:

Fraguency	Maximum RF Line Voltage							
Frequency	Q.P. (dBµV)	Average (dBµV)						
150kHz~500kHz	79	66						
500kHz~30MHz	73	60						

# 6.2 Measurement Setup

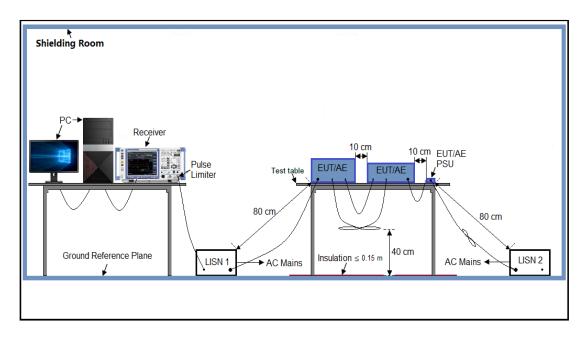



Page 22 of 29

## **6.3 Measurement Procedure**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.4.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- 4. The EUT received AC 120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipment received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test data of the worst case condition (Mode 1) was reported on the following Data page.



### 6.4 Measurement Result

Frequency [Hz]  X X X MES agc_fin  MEASUREMENT RESULT: "agc_fin"  Frequency Level Transd Limit Margin Detector Limit MHz dBμV dB dBμV dB  0.454000 39.70 6.1 57 17.1 QP L1 4.154000 35.20 6.3 56 20.8 QP L1	LISN Line Hot Side	Adapter and ')	12V from A h by Battery	Mode 1(DC 7.4V, 1400mA
70 60 50 40 40 30 20 10 150k 300k 400k 600k 800k 1M 2M 3M 4M 5M 6M 8M 10M 20M 30 Frequency [Hz]  x x xMES agc_fin   MEASUREMENT RESULT: "agc_fin"  Frequency Level Transd Limit Margin Detector Limit MHz dBμV dB dBμV dB  0.454000 39.70 6.1 57 17.1 QP L1 4.154000 35.20 6.3 56 20.8 QP L1				evel [dBµV]
MEASUREMENT RESULT: "agc_fin"    MHz				Γ <u>:</u> <u>:</u> -
10	·			<del>-</del>
### And And Andrews And Andrews And Andrews A				
30 20 10 10 150k 300k 400k 600k 800k 1M 2M 3M 4M 5M 6M 8M 10M 20M 30 Frequency [Hz]  *** **MES agc_fin  **MEASUREMENT RESULT: "agc_fin"  Frequency Level Transd Limit Margin Detector Limit MHz dBμV dB dBμV dB  0.454000 39.70 6.1 57 17.1 QP L1 4.154000 35.20 6.3 56 20.8 QP L1	,,	- bu = 1   =	A+   - +	
10 150k 300k 400k 600k 800k 1M 2M 3M 4M 5M 6M 8M 10M 20M 30 Frequency [Hz]  **Example	**************************************			<u> </u>
0		Anthonormal Principles and Principles		
-10 150k 300k 400k 600k 800k 1M 2M 3M 4M 5M 6M 8M 10M 20M 30 Frequency [Hz]  x x x MES agc_fin  MEASUREMENT RESULT: "agc_fin"  Frequency Level Transd Limit Margin Detector Limit MHz dBμV dB dBμV dB  0.454000 39.70 6.1 57 17.1 QP L1 4.154000 35.20 6.3 56 20.8 QP L1				
MEASUREMENT RESULT: "agc_fin"    MEASUREMENT RESULT: "agc_fin"				<del>     -</del>
MEASUREMENT RESULT: "agc_fin"  Frequency Level Transd Limit Margin Detector Limit MHz dBμV dB dBμV dB  0.454000 39.70 6.1 57 17.1 QP L1 4.154000 35.20 6.3 56 20.8 QP L1	// 2M 3M 4M 5M 6M 8M 10M 20M 30N	1M 2I	600k 800k	150k 300k 400k
0.454000 39.70 6.1 57 17.1 QP L1 4.154000 35.20 6.3 56 20.8 QP L1	" <i>6:</i> "		D=0:::#	
4.154000 35.20 6.3 56 20.8 QP L1	Transd Limit Margin Detector Lin	Transd	Level	EASUREMENT Frequency
# 2200000 26 10 6 2 L6 10 0 AD T1	Transd Limit Margin Detector Lin	Transd	Level	EASUREMENT Frequency
~	Transd Limit Margin Detector Lin dB dBμV dB 6.1 57 17.1 QP L1 6.3 56 20.8 QP L1	Transd dB 6.1 6.3	Level dBµV 39.70 35.20	Frequency MHz 0.454000 4.154000
4.622000 36.10 6.3 56 19.9 QP L1	Transd Limit Margin Detector Lin dB dBμV dB 6.1 57 17.1 QP L1 6.3 56 20.8 QP L1 6.3 56 19.9 QP L1	Transd dB 6.1 6.3 6.3	Level dBµV 39.70 35.20 36.10	Frequency MHz 0.454000 4.154000 4.230000
4.906000 35.70 6.3 56 20.3 QP L1	Transd Limit Margin Detector Lin dB dBμV dB  6.1 57 17.1 QP L1 6.3 56 20.8 QP L1 6.3 56 19.9 QP L1 6.3 56 20.1 QP L1	Transd dB 6.1 6.3 6.3 6.3	Level dBµV 39.70 35.20 36.10 35.90	Frequency MHz 0.454000 4.154000 4.230000 4.362000

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Limit

dΒμV

48

46

46

46

46

50

Margin

dΒ

11.9

19.0

18.7

20.6

17.2

20.3

Detector

ΑV

ΑV

ΑV

ΑV

ΑV

ΑV

Line

L1

L1

L1

L1

L1

L1

Frequency

0.398000

0.634000

0.762000

0.950000

4.602000

5.598000

MHz

Level

dΒμV

36.00

27.00

27.30

25.40

28.80

29.70

Transd

dΒ

6.1

6.2


6.2

6.2

6.3

6.4



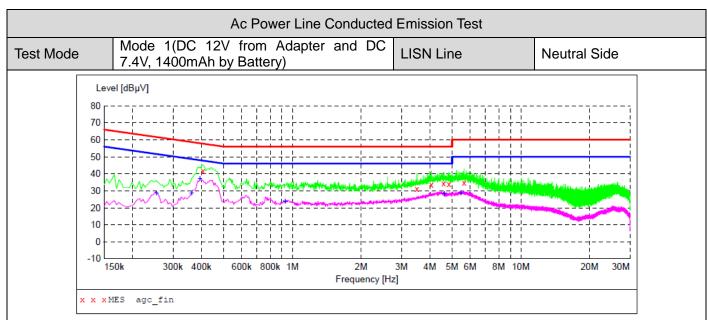

# MEASUREMENT RESULT: "agc\_fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.406000	41.50	6.1	58	16.2	QP	N
3.510000	31.30	6.3	56	24.7	QР	N
4.058000	33.50	6.3	56	22.5	QP	N
4.594000	34.30	6.3	56	21.7	QP	N
4.846000	33.90	6.3	56	22.1	QP	N
5.650000	34.90	6.4	60	25.1	QP	N

# MEASUREMENT RESULT: "agc fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.254000 0.362000 0.394000 0.930000 4.618000 5.466000	28.60 28.70 37.10 24.00 28.20	6.1 6.1 6.2 6.3	52 49 48 46 46	23.0 20.0 10.9 22.0 17.8 21.3	AV AV AV AV	N N N N N

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



									ine Condu		Emis	sio	n Te	est					
Test Mode		ode 1 4V, 25							pter and	DC	LISI	ا Li	ne				Hot Side	Э	
L	evel [dE	3μV]																	
80 70		   			     		  		   	     		   	 	 	 	  		 	
60 50		L	-				-			   		-							
40 30	M	~~/^\.	\ <u>\</u>	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	W.	ار - ا	+	المينية - إ				XXX	X			hele:	Maria la		
20 10							- +	- F -				 	-  -	 	   -   -	+ -        -			
-10		     						-+-		      -	-					<del>  - </del>			
	150k	30	00k 4	00k	6001	k 80	UUK	1M	21 Freque	M ency [Hz		IM !	5M (	ьМ	ВM	10M	20	OM	30M
хх	x MES	agc_fi	n																

# MEASUREMENT RESULT: "agc fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.406000 4.326000 4.466000	42.90 37.80 37.80	6.1 6.3 6.3	58 56 56		ÕР	L1 L1 L1
4.530000 4.702000	37.60 37.30	6.3 6.3	56 56	18.4 18.7	QP QP	L1 L1
4.982000	36.90	6.3	56	19.1	QP	L1

# MEASUREMENT RESULT: "agc\_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.402000	36.20	6.1	48	11.6	VA	L1
0.642000	27.40	6.2	46	18.6	AV	L1
0.802000	27.50	6.2	46	18.5	AV	L1
0.970000	25.80	6.2	46	20.2	AV	L1
4.474000	30.10	6.3	46	15.9	VA	L1
5.806000	30.60	6.4	50	19.4	AV	L1

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



st Mode			ode 1 4V, 25							lapter ai	nd I	oc	LISN	l Lir	ne				Neuti	ral Sic	de
	Lev	vel [dB	BµV]																		
	80	·	   			 										   					
	70 60					L	   	-   -   -	. I -	r ! L	-		,			Ţ	] 	- <del> </del> -			
	50			-	ļ	ļ			<del>-</del> +-					ļ	_	!				-	
	40	/^\πi	i 	<u> </u>	<u> </u>	<u>+</u>			·				المتات			روا	i i	i i 			
	30	<u>'\</u> \\	~~~\ <u>\</u>	1\1\2\3\4\3\4\3\4\4\3\4\4\3\4\4\3\4\4\3\4\4\3\4\4\4\4\4\4\4\4\4\4\4\4\4\4\4\4\4\4\4\4	/ <u> ~~</u> \	<u>\\\</u>	<u>*</u>	<u> </u>	<u> </u>	harana kanana kanan Kanana kanana kanan	Hadda	Milder His	×	X	C X	X	<u> </u>			elinle med	
	20	<u>~~</u>	/ <u>~                                   </u>	₩	- - -			<u> </u>	4					-	 -  	+		-	Minney Co.		
	10	į	 !	- <del> </del>	- <u>-</u>	<u>i</u>	<u> </u>		· -	<u></u>			j		<u>-</u>	<u>i</u>	įj.				
	0		   			<del>+</del>		  -		<del> </del> 					<del>-</del> -						
	-10 <sup>L</sup>	150k	3	00k 4	00k	60	)0k	800	k 1	M	2M	3	M 4	IM 5	M (	5 <b>M</b>	8M	1 10M		20M	30M
										Fi	requer	icy [Hz]									

# MEASUREMENT RESULT: "agc\_fin"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.402000	42.70	6.1	58	15.1	QP	N
3.694000	33.10	6.3	56	22.9	ÕР	N
4.630000	35.40	6.3	56	20.6	QP	N
4.818000	35.10	6.3	56	20.9	QP	N
5.462000	36.10	6.4	60	23.9	QP	N
6.022000	35.40	6.4	60	24.6	QP	N

# MEASUREMENT RESULT: "agc\_fin2"

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.362000	28.40	6.1	49	20.3	VA	N
0.402000	37.60	6.1	48	10.2	VA	N
0.626000	27.40	6.2	46	18.6	VA	N
0.978000	24.60	6.2	46	21.4	VA	N
4.630000	29.30	6.3	46	16.7	VA	N
5.442000	29.60	6.4	50	20.4	VA	N

# **RESULT: PASS**

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/



Page 27 of 29

# **Appendix I: Photographs of Test Setup**

Refer to the Report No.: AGC02550250302AP02



Page 28 of 29

# **Appendix II: Photographs of Test EUT**

Refer to the Report No.: AGC02550250302AP03



Page 29 of 29

# Conditions of Issuance of Test Reports

- 1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").
- 2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

  3.The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.
- 4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.
- 5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.
- 6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations. 7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.
- 8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.
- 9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.

